

PROJECT INFORMATION SHEET

Project Title: Ashton Village Drainage Improvement Project

Project WBS Number: M-420126-0136-4

Council District: G

COH Project Manager: Desmone Kelley (Desmone.Kelley@houstontx.gov)

COH Project Inspector: Jesus M. (Jesus.Serrano-Marrero@houstontx.gov) (281) 627-0550

The Contractor: Texas Dewatering LLC

The Contractor POC: Adrian G. - Project Manager (adrian@texasdewatering.com)

The Contractor POC: Chris R. – Superintendent (Chrisr@texasdewatering.com)


Start Date: March 2026

Completion Date: March 2027

Contract Amount: \$5,689,421.75

PROJECT LOCATION

Ashton Village (Ashclift Drive, Ashlock Drive, Skymedow Drive, Richmond Avenue, Westpark Drive, Ashton Park Drive, Ashfield Drive)

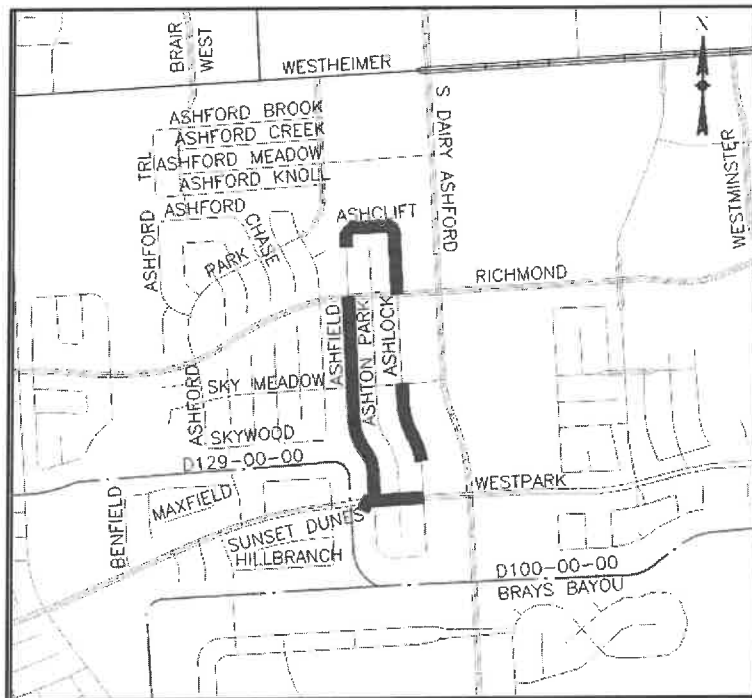

DESCRIPTION OF THE WORK

The scope of this project includes, but is not limited to:

Improvements on Westpark Drive consists of the following:

- Abandonment and fill and removal of existing 24" and 36" RCP from STA 3+76 to STA 10+63.
- Propose 10'x8' RCB under eastbound lanes from STA 4+28 to STA 5+88.
- Propose 8'x8' RCB under eastbound lanes from STA 5+88 to STA 10+63.
- Replace an existing manhole within HCFCRD ROW and connect proposed the 36" RCP with 18" restrictor to it.
- Replace existing B-B inlets with new B-B inlets.
- Replace concrete pavement to install trunkline and crossing pipes.

Improvement on Ashfield Drive consists of the following:

- Abandonment and fill and removal of existing 24" RCP from Westpark Drive to STA 24+46.
- Propose dual 5'x3' RCB from STA 1+46 to STA 2+39.
- Propose 72" RCP under the northbound lane from STA 2+39 to STA 14+05.
- Propose 60" RCP under the northbound lane from STA 14+05 to STA 23+11.
- Propose 5'x4' RCB under the northbound lane from STA 23+11 to STA 24+47.
- Propose 30" RCP under the southbound/westbound lane from STA 30+44 to STA 31+00.
- Replace existing B-B inlets with new B-B inlets.
- Replace concrete pavement to install trunkline and crossing pipes.
- Replace existing pavement identified as in poor condition per field observation.

Improvement on Ashlock Drive consists of the following:

- Propose 36" RCP under the northbound lane from STA 7+93 and connect to the trunkline at Skymeadow Drive.
- Abandonment and fill and removal of existing 24" RCP from Richmond Avenue to STA 31+76.
- Propose 30" RCP from the trunkline at Richmond Avenue to STA 32+35
- Replace existing B-B inlets with new B-B inlets.
- Replace concrete pavement to install trunkline and crossing pipes.
- Replace existing pavement identified as in poor condition per field observation.

Improvement on Ashcliff Drive consists of the following:

- Propose 30" RCP under the westbound lane from STA 1+00 to STA 5+99.
- Replace concrete/asphalt pavement to install trunkline and crossing pipes.
- Replace existing pavement identified as bad condition per field observation.